100 CIRCULAR CONNECTORS

Push-pull connectors cable mounted plug CCA1 series


CCA1P1/A07 7 pole

- Premium range of circular connectors
- IP68 sealed using vacuum technology (when connected and using environmental cable clamp)
- Tough, high performance interconnection
- Ideal for harsh and extreme environments
- · Suitable for broadcasting, autosport, military, rail, marine, security, industrial and agricultural applications
- Key coded to prevent misconnection
- · Will not disconnect when the cable is under load or stress
- Tested to IEC 60512-3-5a



SOCKETS

PART NO.	DESCRIPTION	POLES	SERIES
CCA1P1/A07	Cable mounted plug	7	CCA series

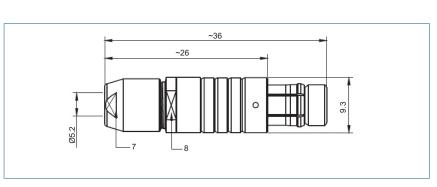

SPECIFICATION				
Shell style/model	Cable mounted straight plug, male contact			
Codes	Code 1			
Contact type	Solder type			
Contact diameter	0.5mm			
Max. stranded conductor	AWG 26-28			
Max diameter	0.43mm			
Vtest (contact-shell)	800V(AC) 1300V(DC)			
Vtest (contact-contact)	1000V(AC) 1800V(DC)			
Rated current	2A			
Rated voltage	≤160V			
Mechanical operation	5000 mating cycles			
Housing material	Brass (natural chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces			
Insulator	PPS			
Contacts	Brass (gold plated)			
Humidity (max)	<=95% [at 60°C /140°F]			
Vibration	15g [10 Hz - 2000 Hz]			
Shock resistance	100g [6 ms]			
Salt spray corrosion	>72 hr			
Climatical category	50/175/21			
Shielding (min)	75 dB (10 MHz)			
Shielding (min)	40 dB (1 GHz)			
IP rating	IP68 (when connected and using environmental cable clamp)			

This product should be used with the following cable clamps:

PART NO.	WIRE RANGE
CCV1C/CC	2.6 - 3.1mm
CCV1C/CD	3.1-3.6mm
CCV1C/CE	3.6-4.1mm
CCV1C/CF	4.1-4.3mm





Non IP68 cable clamps also available

ACCESSORIES

Metal cap for plugs

PART NO.	DESCRIPTION
CCA12	Camcirc metal cap for plug A1



ASSOCIATED PRODUCTS

CCM1S1/07 -CCM series A1 size socket page 124 CCE1S1/07 -CCE series A1 size socket page 142 CCT1S1/07 -CCT series A1 size socket page 148

