


# 6.3x25mm glass and British plug top fuses

## 6.3x25mm glass, quick blow

| PART NO.      | RATING | PART NO.     | RATING |
|---------------|--------|--------------|--------|
| CF06325FG/250 | 250mA  | CF06325FG/3  | 3A     |
| CF06325FG/500 | 500mA  | CF06325FG/5  | 5A     |
| CF06325FG/800 | 800mA  | CF06325FG/7  | 7A     |
| CF06325FG/1   | 1A     | CF06325FG/10 | 10A    |
| CF06325FG/2   | 2A     | CF06325FG/13 | 13A    |

## Product overview

- Quick blow (F)
- Glass cartridge, nickel plated brass end caps
- Break capacity  
35A/250V (250mA-1A)  
100A/250V (1-3A)  
200A/250V (3-13A)
- Approved to IEC 127




## 6.3x25mm glass, time delay

| PART NO.      | RATING | PART NO.     | RATING |
|---------------|--------|--------------|--------|
| CF06325TG/250 | 250mA  | CF06325TG/3  | 3A     |
| CF06325TG/500 | 500mA  | CF06325TG/5  | 5A     |
| CF06325TG/800 | 800mA  | CF06325TG/7  | 7A     |
| CF06325TG/1   | 1A     | CF06325TG/10 | 10A    |
| CF06325TG/2   | 2A     | CF06325TG/13 | 13A    |

## Product overview

- Time delay (T) IEC60127
- Glass cartridge, nickel plated brass end caps
- Break capacity  
35A/250V (250mA-1A)  
100A/250V (1-3A)  
200A/250V (3-13A)
- RoHs, Approved to IEC 127




## 6.3x25mm British plug top


| PART NO.    | RATING |
|-------------|--------|
| CFB1362/3A  | 3A     |
| CFB1362/5A  | 5A     |
| CFB1362/10A | 10A    |
| CFB1362/13A | 13A    |

## Product overview

- Power dissipation max 1 watt
- Ceramic tube, nickel - plated brass end caps
- Break capacity 6000A, 264VAC, 50Hz, p.f. 0.3 to 0.4
- BS1362



Average time current (I-T curves)

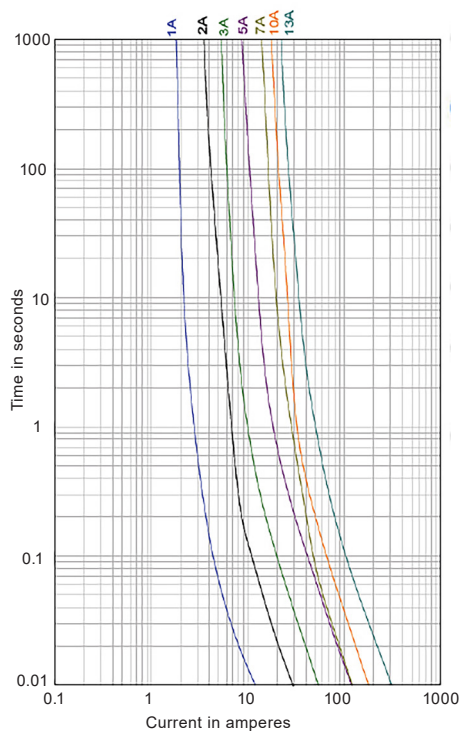

| LIMITS FOR PRE-ARCING TIME |          |        |       |
|----------------------------|----------|--------|-------|
|                            | 1.0In    | 1.6In  | 1.9In |
| In                         | Min      | Min    | Max   |
| 1A - 13A                   | 1000 hrs | 30 min | 30min |