


6.3x32mm glass fuses

6.3x32mm glass, quick blow

PART NO.	RATING	PART NO.	RATING
CFB06332F/100	100mA	CFB06332F/3	3A
CFB06332F/125	125mA	CFB06332F/3.15	3.15A
CFB06332F/160	160mA	CFB06332F/4	4A
CFB06332F/200	200mA	CFB06332F/5	5A
CFB06332F/250	250mA	CFB06332F/6.3	6.3A
CFB06332F/500	500mA	CFB06332F/7	7A
CFB06332F/630	630mA	CFB06332F/7.5	7.5A
CFB06332F/750	750mA	CFB06332F/8	8A
CFB06332F/1	1A	CFB06332F/10	10A
CFB06332F/1.25	1.25A	CFB06332F/12	12A
CFB06332F/1.5	1.5A	CFB06332F/12.5	12.5A
CFB06332F/1.6	1.6A	CFB06332F/15	15A
CFB06332F/2	2A	CFB06332F/20	20A
CFB06332F/2.5	2.5A	CFB06332F/25	25A



6.3x32mm glass, time delay

PART NO.	RATING	PART NO.	RATING
CFB06332T/100	100mA	CFB06332T/2.5	2.5A
CFB06332T/125	125mA	CFB06332T/3	3A
CFB06332T/160	160mA	CFB06332T/3.15	3.15A
CFB06332T/200	200mA	CFB06332T/4	4A
CFB06332T/250	250mA	CFB06332T/5	5A
CFB06332T/500	500mA	CFB06332T/6	6A
CFB06332T/630	630mA	CFB06332T/6.3	6.3A
CFB06332T/750	750mA	CFB06332T/7	7A
CFB06332T/800	800mA	CFB06332T/7.5	7.5A
CFB06332T/1	1A	CFB06332T/8	8A
CFB06332T/1.25	1.25A	CFB06332T/10	10A
CFB06332T/1.5	1.5A	CFB06332T/12	12A
CFB06332T/1.6	1.6A	CFB06332T/12.5	12.5A
CFB06332T/2	2A	CFB06332T/15	15A

Product overview


- Quick blow (F)
- Excellent I²T characteristics
- Welded element for enhanced vibration tolerance
- Glass cartridge, nickel plated brass end caps
- Break capacity
35A/250V (to 1A),
100A/250V (to 3.5A),
200A/250V (above 3.5A)
- Operating temperature -55°C to +125°C
- approved (500mA-3A) (4A-10A) (12A-15A)

Product overview

- Time delay (T)
- Excellent I²T characteristics
- Welded element for enhanced vibration tolerance
- Glass cartridge, nickel plated brass end caps
- Break capacity
35A/250V (to 1A),
100A/250V (to 3.5A),
200A/250V (above 3.5A)
- Operating temperature -55°C to +125°C
- , , approved (500mA-1A) (1.5A-3A) (4A) (10A-15A)

CFB06332F

Average time current (I-T curves)

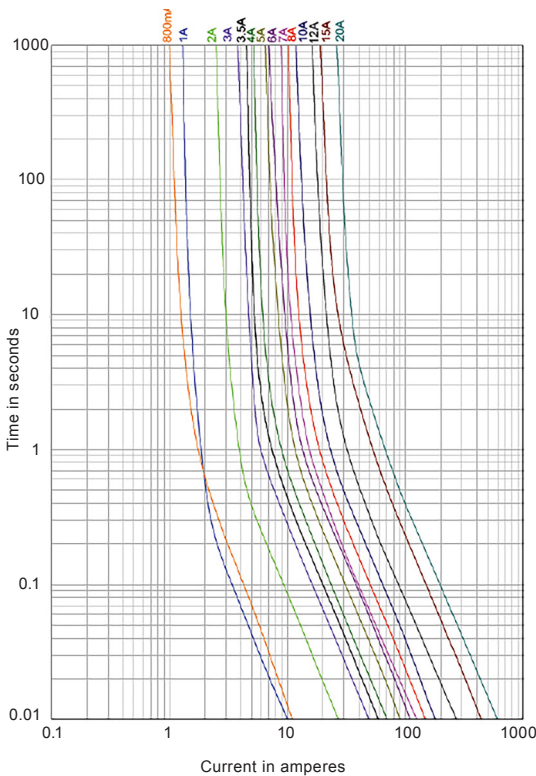

CFB06332T

Average time current (I-T curves)

