

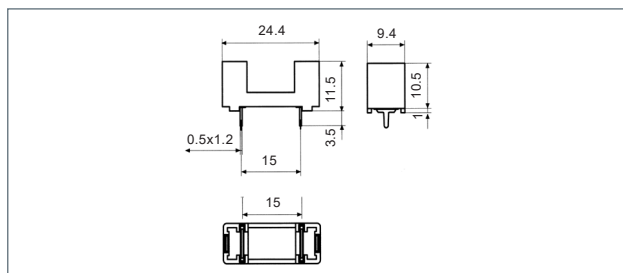
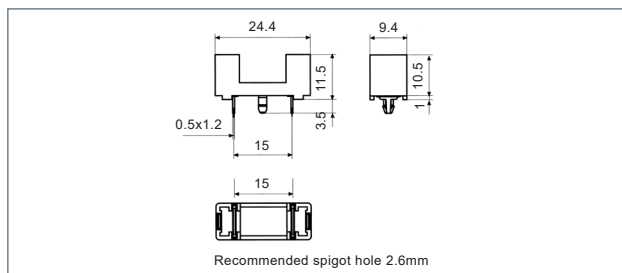
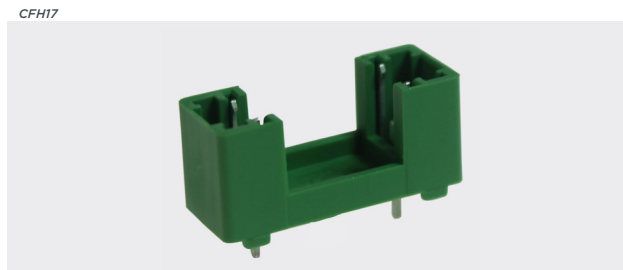
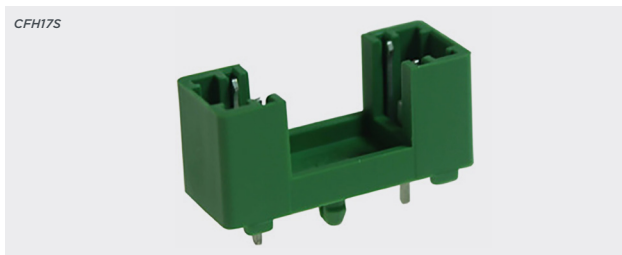
# 5x20mm semi-enclosed PCB mounting 15mm pitch fuseholders

## Product overview

- PCB mounting
- Fuse retaining insulation cover
- Enclosed contacts
- 15mm pitch
- Moulded in green UL94-V0 flame retardant PA
- EN60127-6
-    approved




PART NO.	TYPE
CFH17S	With spigot
CFH17	No spigot

SPECIFICATION	
Rating	VDE - 6.3A/250VAC UL - 20A/250VAC
Contacts/resistance	Tinned, nickel plated Brass, <math><5m\Omega</math>
Moulding	UL94-V0 flame retardant PA
Dielectric strength	3kV / 60"
Power dissipation	1.6W
Recommended PCB hole size	1.5mm
Insulation resistance	100M $\Omega$
Operating temperature	-30°C to +85°C
Shocksafe category	PC1



# 5x20mm semi-enclosed PCB mounting 22.6mm pitch fuseholders

## Product overview

- PCB mounting
- Fuse retaining insulation cover
- Enclosed contacts
- 22.6mm pitch
- Moulded in UL94-V0 flame retardant PA
- EN60127-6
-    approved (Approvals do not apply to cover)



SPECIFICATION	
Rating	VDE - 6.3A/250VAC UL - 20A/250VAC
Contacts/resistance	Tinned, nickel plated brass, <math><5m\Omega</math>
Moulding	UL94-V0 flame retardant PA
Dielectric strength	3kV / 60"
Power dissipation	1.6W (VDE)
Recommended PCB hole size	1.5mm
Insulation resistance	100M $\Omega$
Operating temperature	-30°C to +85°C
Shocksafe category	PC1

PART NO.	TYPE
CFH14	No spigot
CFH14HB	Cover (black)

