


DIN Rail mounting BNC coupler

Product overview


- BNC jack to jack interface
- Available in 50Ω or 75Ω
- 35mm DIN Rail mounting
- Gold plated brass contact
- 50Ω used in controls & instrumentation
- 75Ω used in audio visual and broadcasting
- Optional wall mounting plates available
- RoHS compliant

CIME/BNC

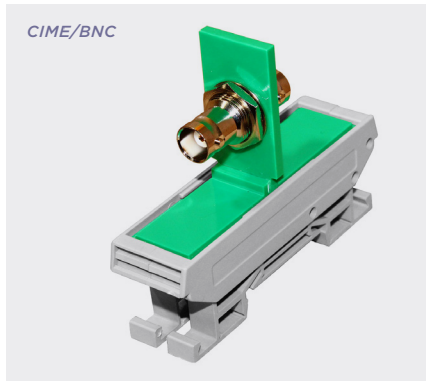

PART NO.	DESCRIPTION
Voltage rating	500V
Frequency range 50Ω	DC to 4GHz
Frequency range 75Ω	DC to 1GHz
Jack material	Nickel plated brass
Contact material	Gold plated brass
VSWR	1.3 max

PART NO.	NO. OF FEET
CIM/BNC-50-1	BNC jack to BNC jack coupler, 50Ω impedance
CIM/BNC-75-1	BNC jack to BNC jack coupler, 75Ω impedance

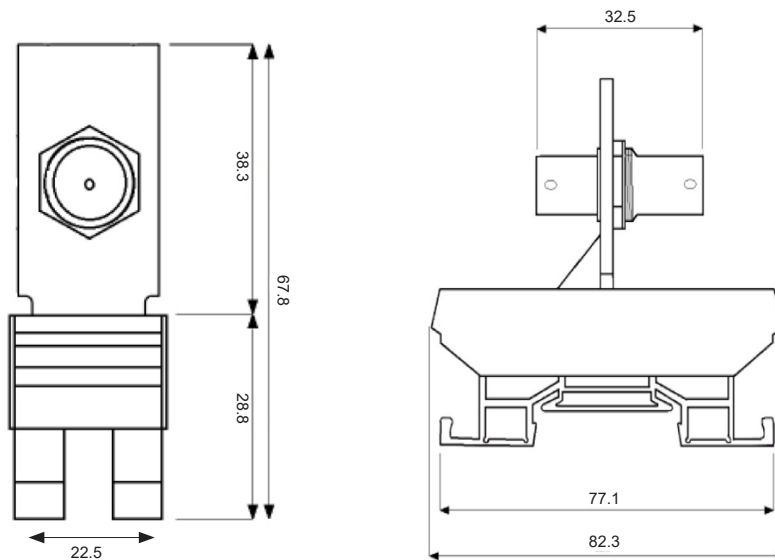

002

PCB TERMINAL
BLOCKS

081

TERMINAL STRIPS

095

WIRE TO BOARD
CONNECTORS

100

CIRCULAR
CONNECTORS

151

IP68 CONNECTORS

158

INTERFACE
MODULES AND
RELAY BASES

ASSOCIATED PRODUCTS

CIME/M/MPR

- Wall mount plates

page 168