



Line taps

Product overview



- Enables connection of additional wires without cutting main conductor
- Capacity from 2x6mm² to 2x150mm²
- Up to 35mm² supplied as 12 pole strips, easily divided
- 50mm² and above supplied singularly, easily interlocked
- 50mm² and above available with Allen screws
- Supplied with raised screws
- Halogen free
- CE approved




SPECIFICATION		
Voltage max	CISB6-35 CISB50-150	500V 1000V
Working temperature	-30°C to +110°C	
Moulding	Natural UL94-V2 self extinguishing PA6	
Insert	Nickel plated brass	
Screws	Zinc-plated brass	

PART NO.	POLES	CURRENT RATING	CAPACITY MIN	CAPACITY MAX	LENGTH	WIDTH	HEIGHT	FIXING HOLE DIAMETER	TERMINAL SCREW	ALLEN SCREW OPTION
CISB6	12	41A	2x2.5mm ²	2x6mm ²	188mm	29mm	17mm	3.2mm	M5	-
CISB10	12	57A	2x4mm ²	2x10mm ²	224mm	31mm	23mm	3.2mm	M7	-
CISB16	12	76A	2x6mm ²	2x16mm ²	260mm	32mm	26mm	3.2mm	M8	-
CISB35	12	125A	2x16mm ²	2x35mm ²	308mm	36mm	34mm	3.2mm	M12	-
CISB50	1	150A	2x25mm ²	2x50mm ²	32mm	63mm	48mm	5.2mm	M14	5
CISB70	1	192A	2x35mm ²	2x70mm ²	34mm	63mm	53mm	5.2mm	M16	6
CISB95	1	232A	2x50mm ²	2x95mm ²	39mm	63mm	56mm	5.2mm	M18	8
CISB120	1	269A	2x70mm ²	2x120mm ²	41mm	70mm	61mm	5.2mm	M20	8
CISB150	1	309A	2x95mm ²	2x150mm ²	56.8mm	115mm	82mm	5.2mm	M28	14


Allen screw option available on 1-pole types, add suffix /A to Type No. (e.g. CISB120/A)

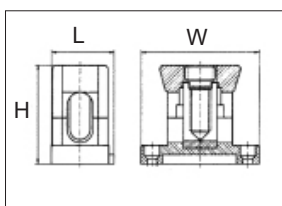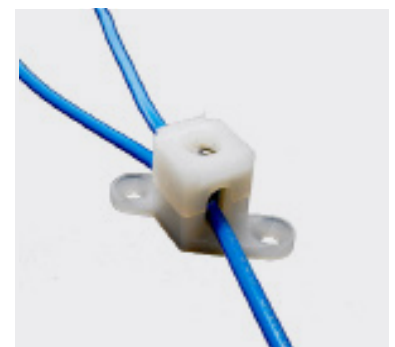

CISB 1 pole

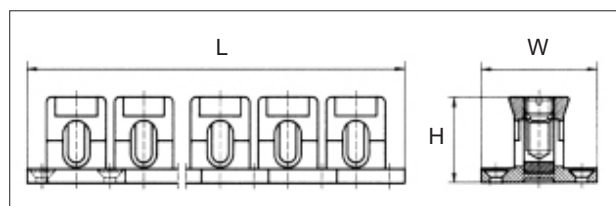

CISB 12 pole

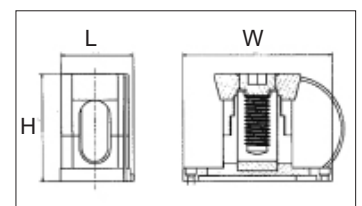

CISB 150