RELAY BASES

PCB TERMINAL BLOCKS

INTER-CONNECTION

FUSES & FUSE-HOLDERS

LEDs & INDICATORS

MINIATURE SWITCHES

LIMIT & SAFETY SWITCHES

CONTROL PRODUCTS

INTERFACE MODULES & SUPPORTS

RELAY BASES

ENCLOSURES

BATTERIES

TRANS-FORMERS


1 & 2 Pole PCB Mounting Relay Bases

- Compact 1 or 2 pole versions
- PCB mounting
- 2.54-5.08mm x 7.62mm pitch
- 3 sizes of fixing clip to suit popular relay sizes in metal and plastic

CHBC	
1	

SPECIFICATION	
Rating	10A/300VAC
Dielectric strength	>5kV
Moulding	UL94-V1 self extinguishing glass filled PA6
Contacts	6μ nickel plated brass

TYPE NO.	POLES	SIZE
CRBC25	1	2.5mm
CRBC32	1	3.2mm
CRBC35	1	3.5mm
CRBC50	2	5.08mm
CRBC5	1	5.04mm
CRCMH16-2		Metal
CRCMH20-2		Metal
CRCMH25-2		Metal
CRCMP12-2		Plastic
CRCMP16-2		Plastic

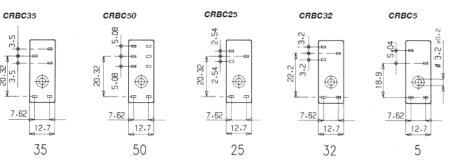

2 Pole PCB Mounting Commercial Relay Bases

C2S080

- 5.0mmx7.5mm pitch
- PCB mounting
- Anti solder wicking pins
- Solid pins for improved solderability
- Metal clip in 3 heights to order
- All approved

020000
A STATE OF THE PARTY OF THE PAR

TYPE NO.	DESCRIPTION
C2S080	2 pole base

SPECIFICATION	
Rating	12A/250VAC
Dielectric strength	>2.5kV
Working temperature	-25°C +70°C
Moulding	UL94-V1 self extinguishing glass filled PP0
Contacts	6μ tin plated brass
Insertion force	100N max

