

5mm double decker rising clamp terminal blocks

Product overview


- Double interlocking mechanism for increased strength
- Double decker
- Moulded in green UL94-VO flame retardant PA66
- 2.5mm² - IEC
- 30-14 AWG - UL
- Professional rising clamp terminals
- Guided pin alignment
- approved

CTBPDDVG



SPECIFICATION	
Rating	UL=15A/300V VDE=18A/250V
Insulation resistance	500M Ω/500V
Withstand voltage	AC2000V/1min
Contact resistance	20mΩ (max)
Working temperature	-40°C to +105°C
Moulding	UL94-VO flame retardant PA66
Pin/terminal	Tin plated brass
Rising clamp	Brass, nickel plated
Screw/torque	M2.5 steel, zinc plated 0.4Nm
Recommended PCB hole size	ø1.5mm

PART NO.	POLES	LENGTH
CTBPDDVG/2	4	12.5mm
CTBPDDVG/3	6	17.5mm
CTBPDDVG/4	8	22.5mm
CTBPDDVG/5	10	27.5mm
CTBPDDVG/6	12	32.5mm
CTBPDDVG/7	14	37.5mm
CTBPDDVG/8	16	42.5mm
CTBPDDVG/9	18	47.5mm
CTBPDDVG/10	20	52.5mm
CTBPDDVG/11	22	57.5mm
CTBPDDVG/12	24	62.5mm

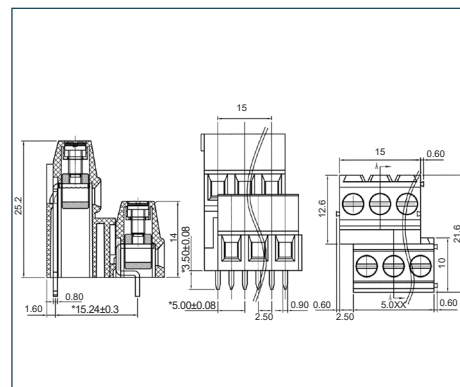

KEY FEATURES

Double decker | Double interlocking mechanism | Professional rising clamp

