




# Screw to screwless terminal strips

## Product overview

- Moulded in UL94-V0 self extinguishing PA66
- Fast connection of two or four solid conductors
- Screw to screw earth terminal
- Raised screws for easier insertion of conductors
- 12-poles, 2-poles plus earth, 3-poles plus earth or 4-poles plus earth
- 12-pole types can be pre-cut to specified number of poles
- All earth types marked with symbols for Live, Earth and Neutral
- CE 72/73 and 93/68 Compliant with EN60598 4.7 and 11.2 (EN60598/1 for CTS4P series)
- All tests from EN60998-1, EN60998-2-1 and EN60998-2-2
- Passes 960°C glow-wire test according to EN 60695-2-11
- CE, ,  approved

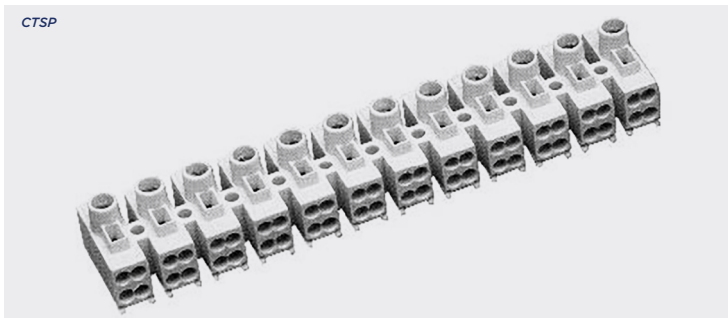


SPECIFICATION	
Rating	24A 450VAC
Working temperature	+110°C
Moulding	UL94-V0 flame retardant PA66
Earth insert	Nickel-plated brass
Push in terminals Insert Clamping spring	Steel Stainless steel
Fixing pitch	10mm

PART NO.	POLES	CONNECTING CAPACITY SCREW	CONNECTING CAPACITY FAST (RIGID)	CONDUCTOR SECTION (MIN) SCREW	CONDUCTOR SECTION (MIN) FAST (RIGID)	LENGTH	WIDTH	HEIGHT	EARTH INSERT	FIXING HOLE
CTS2P/12	12	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	119mm	19mm	20mm	-	2.8mm
CTS2P/3E	3 (2+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	27mm	27.5mm	20mm	4.1mm	2.8mm
CTS2P/3ES	3 (2+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	27mm	27.5mm	20mm	4.1mm	drill 3.2mm
CTS2P/4E	4 (3+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	37mm	27.5mm	20mm	4.1mm	2.8mm
CTS2P/4ES	4 (3+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	37mm	27.5mm	20mm	4.1mm	drill 3.2mm
CTS2P/5E	5 (4+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	47mm	27.5mm	20mm	4.1mm	2.8mm
CTS2P/5ES	5 (4+earth)	2.5mm <sup>2</sup>	2x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	47mm	27.5mm	20mm	4.1mm	drill 3.2mm
CTS4P/12	12	2.5mm <sup>2</sup>	4x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	118mm	21.5mm	17.6mm	-	2.9mm
CTS4P/12S	12	2.5mm <sup>2</sup>	4x 1.5mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	118mm	21.5mm	17.6mm	-	drill 3.5mm
CTS4P/3ES	3 (2+earth)	2.5mm <sup>2</sup>	4x 1.0mm <sup>2</sup>	1mm <sup>2</sup>	0.75mm <sup>2</sup>	27.5mm	26.5mm	20mm	3.2mm	drill 3.2mm

## Strain relief

### Product overview

- Clamps external conductors in lighting fixtures according to EN 60598
- Natural colour PA6
- Relieves strain on cables
- Prevents conductors from twisting
- Protects wire coating from abrasion and friction

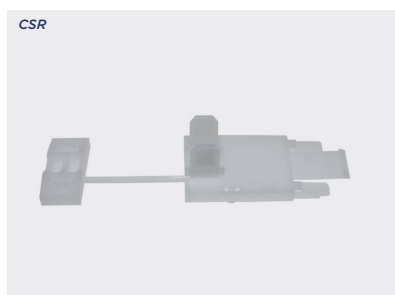

PART NO.	TERMINAL STRIP
CSR4	CTS2P/E and CTS2P/ES
CSR5	CTS4P/ES

### KEY FEATURES

Screwless style | Easily cut to required size | Passes GWT 960°C



