



IP65 illuminated pushbuttons



Product overview

- Plastic IP65 illuminated flush pushbutton switches
- 22mm diameter
- Momentary or latching
- Easy assemble contact block and support module
- Additional button options to order
- Conforms to IEC 60947-5-1 EN60947-5-1 standards
- approved




SPECIFICATION		
Rated voltage*	690V	
Rated AC current	24V	10A
	240V	6A
	400V	4A
Rated DC current	24V	2.8A
	125V	0.55A
	250V	0.27A
Withstand voltage	8kV	
Resistance	≤25mΩ	
Material	Plastic	Thermoplastic body
Ingress protection	IP65** IP20***	
Mechanical durability	300,000	
Operating temperature	-25°C to 70°C	

PART NO.	LED COLOUR
CCPPRI30RD	Red
CCPPRI30GW	Green
CCPPRI30YW	Yellow
CCPPRI30BL	Blue
CCPPRI30CL	Transparent
CCPPRI30WH	White

*According to IEC 60947-1 & EN60947-1
 **Front of panel
 ***Rear of panel

PART NO.	DESCRIPTION
CCPIPP	Mounting plate
CCPICOG	Green NO contact block
CCPICIR	Red NC contact block
CCPICLB	Brown NO latching contact block

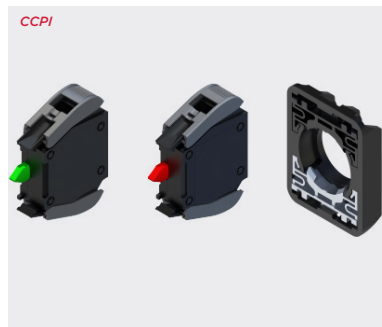

LED COLOUR	12V	24V	110V	230V
Red	CCPIC012R	CCPIC024R	CCPIC110R	CCPIC230R
Green	CCPIC012G	CCPIC024G	CCPIC110G	CCPIC230G
Yellow	CCPIC012Y	CCPIC024Y	CCPIC110Y	CCPIC230Y
Blue	CCPIC012B	CCPIC024B	CCPIC110B	CCPIC230B
White	CCPIC012W	CCPIC024W	CCPIC110W	CCPIC230W



178
MICROSWITCHES

182
TACTILE SWITCHES

186
22MM CONTROL SWITCHES

191
FOOT SWITCHES

193
LIMIT SWITCHES

203
PIEZO SWITCHES AND KEYPADS

SWITCH

ASSOCIATED PRODUCTS

- CCS00GY01 - Electrical enclosures page 336/337
- CAE series - Diecast aluminium electrical enclosures page 409

