


# Safety limit switches

## Product overview

- Visible operation
- Electromechanical limit safety switch
- High switch current
- Precise operating points
- Snap action, slow action, break and make before break, simultaneous action contact block options
- 1, 2 and 3 cable inlet options
- Polymeric IP65 and metal IP66 casing
- PG13.5 inlet as standard
- M20x1.5 inlet available to order



SPECIFICATION	
Rating	10A/24VAC, 1A/230VAC-3, 9A/380VAC-1 8A/24VDC-2, 0.27A/250VDC
Insulation voltage	CE10-M and CE21-M: 690V 400V
Impulse withstand voltage	6kV
Operating temperature	-25°C to +70°C
Short circuit protection	Fuse 10A type gG

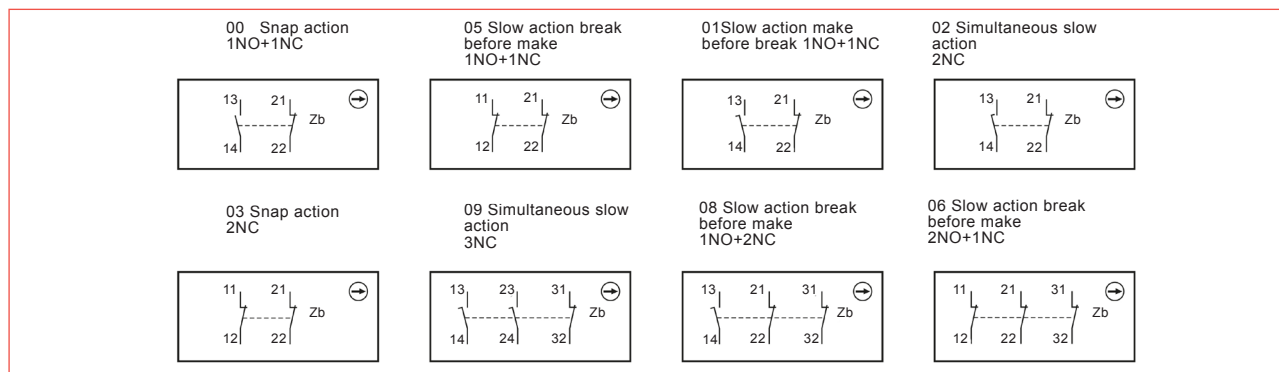

## 30mm polymeric casing 1 cable inlet IP65

S5

PART NO.	CONTACT CONFIGURATION
CE10.00.S5P	00
CE10.01.S5P	01
CE10.02.S5P	02
CE10.03.S5P	03
CE10.05.S5P	05

SC

PART NO.	CONTACT CONFIGURATION
CE10.00.SCP	00
CE10.01.SCP	01
CE10.02.SCP	02
CE10.03.SCP	03
CE10.05.SCP	05

## 30mm metal casing 1 cable inlet IP66

S5

PART NO.	CONTACT CONFIGURATION
CE10.00.S5M	00
CE10.01.S5M	01
CE10.02.S5M	02
CE10.03.S5M	03
CE10.05.S5M	05

SC

PART NO.	CONTACT CONFIGURATION
CE10.00.SCM	00
CE10.01.SCM	01
CE10.02.SCM	02
CE10.03.SCM	03
CE10.05.SCM	05

# Safety limit switches

## 40mm polymeric casing 1 cable inlet IP65

S5

PART NO.	CONTACT CONFIGURATION
CE41.00.S5P	00
CE41.01.S5P	01
CE41.02.S5P	02
CE41.03.S5P	03
CE41.05.S5P	05
CE41.06.S5P	06
CE41.08.S5P	08
CE41.09.S5P	09

## 40mm metal casing 1 cable inlet IP66

S5

PART NO.	CONTACT CONFIGURATION
CE41.00.S5M	00
CE41.01.S5M	01
CE41.02.S5M	02
CE41.03.S5M	03
CE41.05.S5M	05
CE41.06.S5M	06
CE41.08.S5M	08
CE41.09.S5M	09

T

PART NO.	CONTACT CONFIGURATION
CE41.00.TM	00
CE41.02.TM	02
CE41.05.TM	05
CE41.06.TM	06
CE41.08.TM	08
CE41.09.TM	09

## 50mm polymeric casing 3 cable inlet IP65

S5

PART NO.	CONTACT CONFIGURATION
CE20.00.S5P	00
CE20.01.S5P	01
CE20.02.S5P	02
CE20.05.S5P	05

SC

PART NO.	CONTACT CONFIGURATION
CE20.00.SCP	00
CE20.01.SCP	01
CE20.02.SCP	02
CE20.03.SCP	03
CE20.05.SCP	05

T

PART NO.	CONTACT CONFIGURATION
CE20.00.TB	00
CE20.01.TB	02
CE20.05.TB	05
CE20.08.TB	08
CE20.09.TB	09

## 50mm metal casing 3 cable inlet IP66

S5

PART NO.	CONTACT CONFIGURATION
CE21.00.S5M	00
CE21.01.S5M	01
CE21.02.S5M	02
CE21.03.S5M	03
CE21.05.S5M	05

SC

PART NO.	CONTACT CONFIGURATION
CE21.00.SCM	00
CE21.01.SCM	01
CE21.02.SCM	02
CE21.03.SCM	03
CE21.05.SCM	05

T

PART NO.	CONTACT CONFIGURATION
CE21.02.TM	02
CE21.05.TM	05

## 60mm metal casing 1 cable inlet IP66

S5

PART NO.	CONTACT CONFIGURATION
CE31.00.S5M	00
CE31.01.S5M	01
CE31.02.S5M	02
CE31.03.S5M	03
CE31.05.S5M	05
CE31.06.S5M	06
CE31.08.S5M	08
CE31.09.S5M	09

SC

PART NO.	CONTACT CONFIGURATION
CE31.00.SCM	00
CE31.02.SCM	02
CE31.05.SCM	05
CE31.06.SCM	06
CE31.08.SCM	08
CE31.09.SCM	09